




Up to 2,000 l/min at 8 bar
max. 16 bar

APF 2-TURBOFIGHTER

The APF 2-TurboFighter, weighing only 10 kg, is a genuine lightweight among portable monitors. It offers the option of attaching a jet spray nozzle. Both the vertical and horizontal swivel movement allow continuous adjustment. The TurboFighter has an integrated ball valve for shut-off. It is comfortably compact and lightweight on the vehicle and holding in your hand. The special supporting legs provide stability in use and can be folded in for transport; the monitor transport position additionally minimises space requirements.

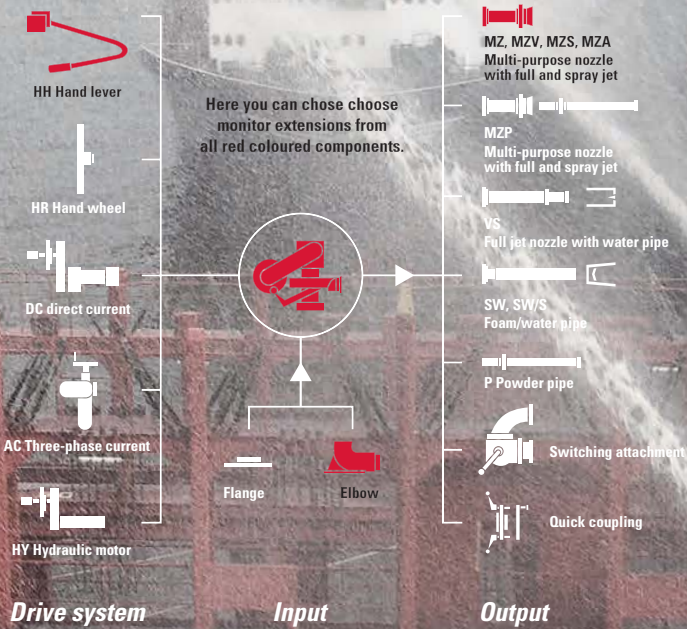

APF 2-TURBOFIGHTER - MZ 2000

APF 2-TURBOFIGHTER - MZV 2000



- STORZ
- BSP
- BI
- DSP/AR
- GUI
- NH
- SMS
- NOR
- FIN
- GOST
- UN
- BAR

Type	TurboFighter
Input	Storz 75 (B) adapter
Outlet	Multi-purpose nozzle MZ 2000
Equipment	-
Swivelling range	Horizontal $\pm 40^\circ$ Vertical $+20^\circ$ to $+60^\circ$
Flow rate	2000 l/min at 8 bar
Maximum pressure	16 bar
Length / Width / Height	630 / 200 / 287 mm
Weight	approx. 10 kg
Paint finish	Powder-coated RAL 3000
AWG ID no.	312 834 34

Type	TurboFighter
Input	Storz 75 (B) adapter
Outlet	Multi-purpose nozzle MZV 2000
Equipment	-
Swivelling range	Horizontal $\pm 40^\circ$ Vertical $+20^\circ$ to $+60^\circ$
Flow rate	2000 l/min at 8 bar adjustable from 600 - 2000 l/min in steps of 200 each
Maximum pressure	16 bar
Length / Width / Height	630 / 200 / 287 mm
Weight	approx. 10 kg
Paint finish	Powder-coated RAL 3000
AWG ID no.	607 963 34

! Other connection systems on request

- Portable monitor for mobile use
- Horizontal adjustment with handle
- Vertical adjustment on nozzle
- Change of jet shape during operation
- Collapsible for transport and storage
- Safety rope

- Portable monitor for mobile use
- Horizontal adjustment with handle
- Vertical adjustment on nozzle
- Change of jet shape during operation
- Collapsible for transport and storage
- Safety rope

APF 2-TURBOFIGHTER-osz. - MZ 2000



- STORZ
- BSP
- BI
- DSP/AR
- GUI
- NH
- SMS
- NOR
- FIN
- GOST
- UN
- BAR

Type	TurboFighter
Input	Storz 75 (B) adapter
Outlet	Multi-purpose nozzle MZ 2000
Equipment	Horizontal oscillating unit (symmetrical $\pm 30^\circ$)
Swivelling range	Horizontal $\pm 30^\circ$ Vertical $+20^\circ$ to $+60^\circ$
Flow rate	1500 l/min at 8 bar
Maximum pressure	16 bar
Length / Width / Height	820 / 287 / 300 mm
Weight	approx. 15 kg
Paint finish	Powder-coated RAL 3000
AWG ID no.	300 833 34

! **Other connection systems on request**

- Portable monitor for mobile use
- Horizontal adjustment with handle
- Vertical adjustment on nozzle
- Change of jet shape during operation
- Connectible, horizontally oscillating unit
- Collapsible for transport and storage
- Safety rope

